6. Exploded View & Parts List

6-1 CF21K22TSXXEF

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

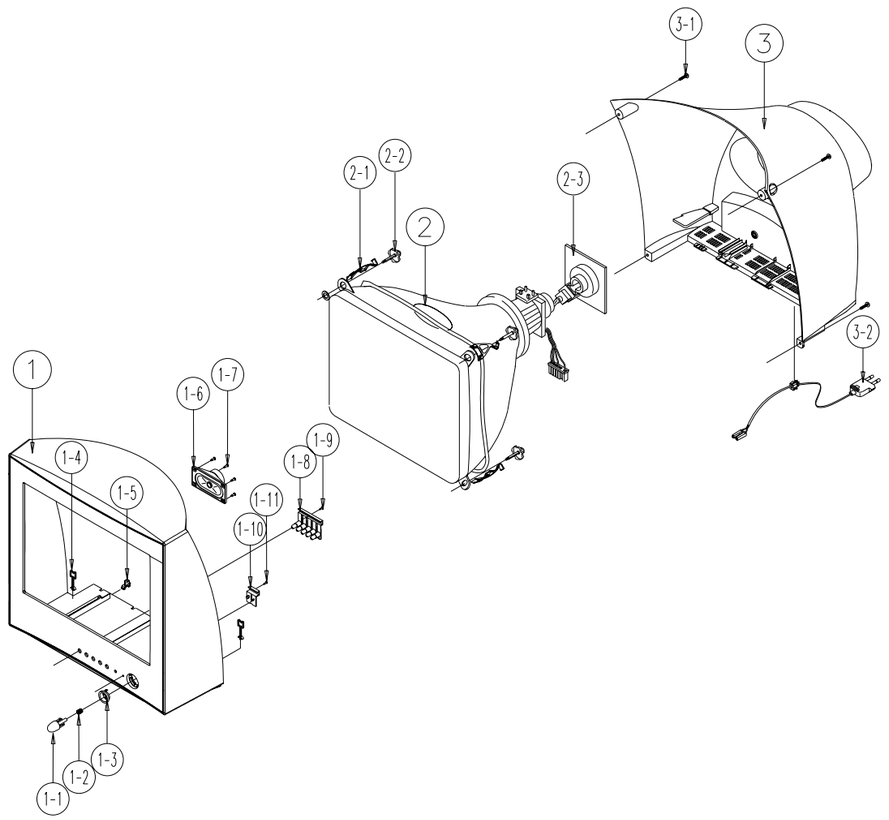

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1	AA96-01637A	ASSY COVER P-FRONT;21K2,HIPS HB,KS1A,SV0		1		
1*	AA64-02387E	CABINET FRONT;21K2,KS1A,HIPS,HB,SV012P+P		1		
1-1	AA64-02092D	KNOB POWER;21K2,HIPS,HB,GD-906P,KS1A		1		
1-2	AA61-60003T	SPRING ETC-CS;-,SUS304,-,-,OD7,N5,OD7,-,		1		
1-3	HA64-01697B	DECORATION-POWER;DECORATION-POWER;15K2,P		1		
1-4	AA65-30008A	CLAMPER CORE-CORD;-,PE,HB,-,BLK,-		1		
1-5	AA94-12517A	ASSY PCB MISC-A/V FRONT;(..73,..H1),KS1A		1		
1-6	AA96-00853A	ASSY SPEAKER;,16OHM,3W,3001-001039,700		1		
1-7	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
1-8	AA64-01702C	KNOB CONTROL;21K2,HIPS,HB,GD-906P,GRY		1		
1-9	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		1	KC+CF	
1-10	HA64-01694B	WINDOW-RMC,LED;15K2,ACRYL,CLR		1		
1-11	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		1	LED+CF	
2	AA91-06621A	ASSY CPT;,21,+380MG,A51ERF135X85,KS1A		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2	AA60-10050Q	SCREW-ASSY;-,SWRCH18A,M5,L26.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001105	SOCKET-CRT;11P,20PI,26.5PI,NI,-		1	V999S	
3	AA64-02368C	CABINET BACK;21K2,KS1A		1		
3-1	6002-000515	SCREW-TAPPING;RH,+,2,M4,L15,ZPC(WHT),SWR		4	CB+CF	
3-2	AA96-01126A	ASSY POWER CORD;DP,AA39-10001G,CP2,H/C25		1	P/CORD	

6-2 CS21D8SX/RNK

You can search for the updated part code through ITSELF web site.
URL : http://itself.sec.samsung.co.kr

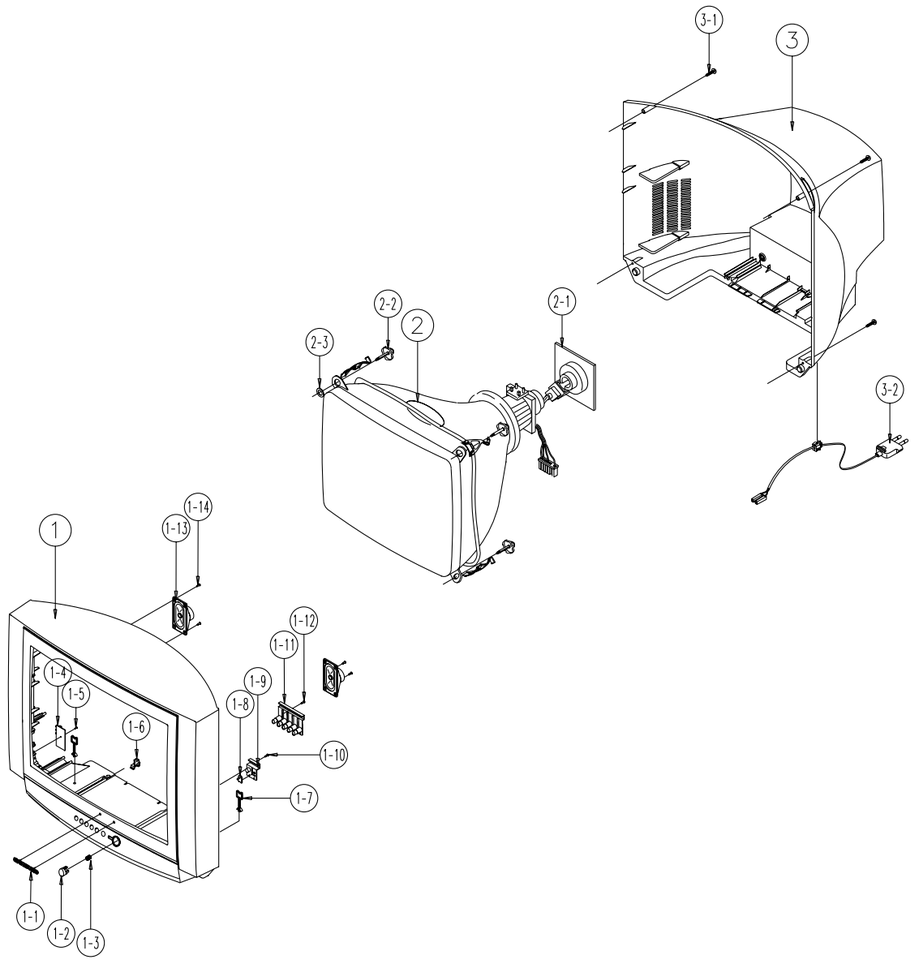

No	Code No	Description	Specification	Q'ty	Remark	S.N.A
1*	AA64-03625A	CABINET;CS21D8SX/RNK,HIPS,T2.5,HB,SV012P		1		
1-1	AA64-70123B	BADGE-BRAND;-,AL,-,-,L=50,SAMSUNG,SILVER		1		
1-2	AA64-01425C	KNOB POWER;21D8(TTSEC),ABS,HB,G3676,SV-0		1		
1-3	AA61-60003J	SPRING ETC-CS;-,SUS304,-,-,OD6,N7,OD6,-,		1	POWER	
1-4		ASSY SUB-A/V SIDE		1		
1-5	6003-001268	SCREW-TAPTITE;TH,+,B,M4.0,L12.0,ZPC(YEL)		1	AV+CF	
1-6	AA61-40113A	STOPPER-PCB;501H,HIPS,-,-,HB,NTR,-		1		
1-7	AA65-30111A	CLAMPER CORE-WIRE;ALL MODEL,NYLON,V0,-,W		1		
1-8	AA64-01011B	INDICATOR LED;29D8,ACRYL,-,CLR,-,-,-		1		
1-9	AA64-01426B	WINDOW REMOCON;21D8,PC,-,-,-,VOILET,-,-		1		
1-10	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		1	WIN+CF	
1-11	AA64-01012E	KNOB CONTROL;29D8(TTSEC),ABS,HB,G3676,SV		1		
1-12	6003-001026	SCREW-TAPTITE;RH,+,B,M4,L15,ZPC(BLK),SWR		1	KC+CF	
1-13	AA96-10146C	ASSY SPEAKER;-,8ohm,5W,3001-000274,350/7		1		
1-14	6003-001019	SCREW-TAPTITE;RH,+,B,M4,L12,ZPC(BLK),SWR		8	SPK+CF	
2	AA97-01360A	ASSY CRT;A51KQJ63X02(H),+380MG,21		1		
2-1	AA65-30107A	CLAMPER CORE-D,COIL;20~22 INCH,NYLON 66,		4		
2-2	AA60-10050R	SCREW-ASSY;-,SWRCH18A,M5,L31.5,HH,+,WC,-		4	CRT+CF	
2-3	3704-001090	SOCKET-CRT;9P,15.24PI,26.5PI,SN,-		1	V999S	
3	AA64-01422B	CABINET BACK;21D8,HIPS,-,-,-,HB,BLK,-		1		
3-1	AA60-10050T	SCREW-TAPPING;-,SWRCH18A,M4,L20,RH,+,2S,		4	CB+CF	
3-2	AA96-00043A	ASSY POWER CORD;-,RVVB 2X075.240,EP2/YES		1		